

## Cold Cathode Fluorescent Lamp(CCFL)




• New CCFL package - T5 lamp socket,  
1 lamp or 2 lamps compatible.

- Super Brightness with Low Power Consumption
- Up to 50,000 Hours Life
- Choice of Warm Color, Day Light, Green, Blue and Red Color
- Ideal for LCD Back Lighting
- Ideal for Low Profile Lighting Fixture Design
- Light Weight and Cool Operation
- Custom Length is Available per OEM Specifications
- Electronic Ballast and DC-AC Inverter are Available for All Lamps

Models	Diameter	Length	Lamp Current	Lamp Voltage	Brightness (cd / m <sup>2</sup> )
CCFL26150	2.6mm	150mm	5mA	400V	33,000
CCFL26250	2.6mm	250mm	5mA	600V	33,000
CCFL26266	2.6mm	266mm	5mA	700V	33,000
CCFL30150	3.0mm	150mm	5mA	400V	32,000
CCFL30250	3.0mm	250mm	5mA	600V	32,000
CCFL30266	3.0mm	266mm	5mA	700V	32,000
CCFL41150	4.1mm	150mm	5mA	400V	17,000
CCFL41250	4.1mm	250mm	5mA	600V	17,000
CCFL41266	4.1mm	266mm	5mA	700V	17,000
CCFL41300	4.1mm	300mm	5mA	800V	17,000

## DC-AC Inverter & Electronic Ballast – for Cold Cathode Lamps

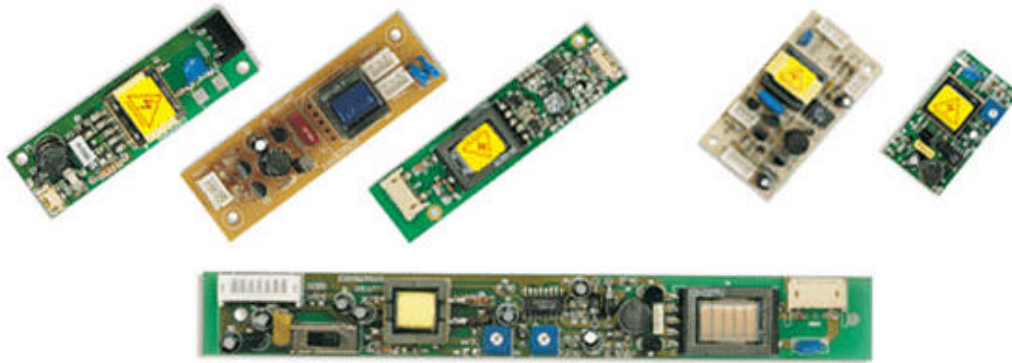

- Wide Selection of DC Input Voltage –5V, 6V, 12V
- Line Input Voltage Electronic Ballast is Available -120V, 230V, 277V or Universal Input (120V~277V)
- Open Frame PCB Type or Enclosed Case Type
- Custom Design is Available per OEM Specifications

Models	Lamp Qty	Input Voltage	Input Current	Frequency	Lamp OD	Lamp Length
187	2	12V, DC	700mA	30kHz	4.1mm	200~266mm
206	1	12V, DC	360mA	30kHz	4.1mm	200~266mm
303A	1	12V, DC	220mA	50kHz	2.6mm	150~180mm
257A	1	12V, DC	360mA	50kHz	2.6mm	200~266mm
296F	1	12V, DC	360mA	30kHz	2.6mm	200~266mm
303	1	5V, DC	670mA	60kHz	2.6mm	150~266mm
901	2	120V, AC	50mA	50kHz	2.6mm	200~250mm
902	2	120~277V, AC	70mA	50kHz	2.6mm	200~266mm